

CERTIFICATE OF ANALYSIS FOR

IRON OXIDE COPPER-GOLD ORE

CERTIFIED REFERENCE MATERIAL

OREAS 521

Summary Statistics for Key Analytes (see Table 1 for 156 additional certified values).

Constituent (ppm)	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
Pb Fire Assay						
Au, Gold (ppm)	0.376	0.019	0.369	0.383	0.373*	0.380*
Aqua Regia Digestion						
Au, Gold (ppm)	0.365	0.009	0.362	0.368	0.361 [†]	0.369 [†]
4-Acid Digestion						
Co, Cobalt (ppm)	386	14	381	392	379	394
Cu, Copper (wt.%)	0.607	0.015	0.601	0.612	0.597	0.617
Infrared Combustion						
S, Sulphur (wt.%)	2.17	0.047	2.15	2.19	2.14	2.19

*Gold Tolerance Limits for typical 30g fire assay charge weight determined from 20 x 85mg NAA results and the Sampling Constant (Ingamells & Switzer, 1973);

[†]Gold Tolerance Limits for typical 25g aqua regia sample weight determined as above;

Please note: intervals may appear asymmetric due to rounding.

The homogeneity of OREAS 521 is of a level such that **negligible sampling error exists** for a conventional fire assay, peroxide fusion, 4-acid digestion, 3-acid digestion, aqua regia digestion, infrared combustion or pycnometry determination.

INTRODUCTION

OREAS reference materials are intended to provide a low cost method of evaluating and improving the quality of analysis of geological samples. To the geologist they provide a means of implementing quality control in analytical data sets generated in exploration from the grass roots level through to prospect evaluation, and in grade control at mining operations. To the analyst they provide an effective means of calibrating analytical equipment, assessing new techniques and routinely monitoring in-house procedures.

SOURCE MATERIALS

Certified Reference Material (CRM) OREAS 521 was prepared from a blend of iron oxide copper-gold ore and magnetite-bearing waste rock (altered, porphyritic, intermediate volcanic rock). The mineralisation is hosted by a breccia comprising strongly altered and replaced felsic volcanic fragments in a matrix largely composed of magnetite, calcite, pyrite, biotite, chalcopyrite, K feldspar titanite and quartz. Accessory minerals include garnet, barite, molybdenite, fluorite, amphibole, apatite, monazite, arsenopyrite, a LREE fluorocarbonate, galena, cobaltite, sphalerite, scheelite, uraninite and tourmaline. Copper occurs as native copper, bornite and chalcopyrite. Gold occurs mainly in the molecular framework of the chalcopyrite. Significant levels of cobalt, molybdenum, rare earth elements and low levels of uranium are also present. The ore and waste materials were sourced from the Ernest Henry Mine located about 38 kilometres north-east of Cloncurry in north-west Queensland.

COMMINUTION AND HOMOGENISATION PROCEDURES

The material constituting OREAS 521 was prepared in the following manner:

- drying to constant mass at 105°C;
- crushing and milling of the ore material to 100% minus 35 microns;
- crushing and milling of the barren material to 99% minus 75 microns;
- blending in appropriate proportions to achieve the desired grades;
- packaging in 60g and 100g units sealed under nitrogen in laminated foil pouches.

ANALYTICAL PROGRAM

Twenty six commercial analytical laboratories participated in the program to certify the 161 analytes reported in Table 1. The following methods were employed:

- Gold via 25-50g fire assay with AAS (18 labs) or ICP-OES (6 labs) finish;
- Gold via 15-40g aqua regia digestion with ICP-MS (12 labs) or AAS (5 labs) finish;
- Instrumental neutron activation analysis (INAA) for Au on 85mg subsamples to confirm homogeneity (1 lab);
- Peroxide fusion for full elemental suite ICP-OES and ICP-MS finishes (up to 19 laboratories depending on the element);
- 4-Acid digestion (HF-HNO₃-HClO₄-HCl) for full elemental suite ICP-OES and ICP-MS finishes (up to 22 laboratories depending on the element; one lab used an AAS finish for Cu only);

- 3-Acid digestion ($\text{HNO}_3\text{-HClO}_4\text{-HCl}$) for Ag, As, Co, Cu, Fe, Mo and S with ICP-OES or AAS finishes (up to 16 laboratories depending on the element; one lab used an ICP-MS finish for Ag, As and Mo);
- Aqua regia digestion (see note below) for full elemental suite ICP-OES and ICP-MS finishes (up to 14 laboratories depending on the element; some laboratories used an AAS finish for certain elements i.e. Ag, As, Co, Cu, Fe and Mo);
- S by IR combustion furnace (21 labs);
- Specific gravity by gas (11 labs) or liquid (5 labs) pycnometry.

It is important to note that in the analytical industry there is no standardisation of the aqua regia digestion process. Aqua regia is a partial empirical digest and differences in recoveries for various analytes are commonplace. These are caused by variations in the digest conditions which can include the ratio of nitric to hydrochloric acids, acid strength, temperatures, leach times and secondary digestions. Recoveries for sulphide-hosted base metal sulphides approach total values, however, other analytes, in particular the lithophile elements, show greater sensitivity to method parameters. This can result in lack of consensus in an inter-laboratory certification program for these elements. The approach applied here is to report certified values in those instances where reasonable agreement exists amongst a majority of participating laboratories. The results of specific laboratories may differ significantly from the certified values, but will, nonetheless, be valid and reproducible in the context of the specifics of the aqua regia method in use. Users of this reference material should, therefore, be mindful of this limitation when applying the certified values in a quality control program.

For the round robin program twenty 1kg lot samples were taken at predetermined intervals during the bagging stage, immediately following final blending and are considered representative of the entire batch. The six samples received by each laboratory were obtained by taking two 110g scoop splits from each of three separate 1kg lots. This format enabled nested ANOVA treatment of the results to evaluate homogeneity, i.e. to ascertain whether between-unit variance is greater than within-unit variance. Table 1 presents the 161 certified values together with their associated 1SD's, 95% confidence and tolerance limits and Table 2 shows 35 indicative values. Table 3 shows the gold instrumental neutron activation analysis (INAA) results for twenty 85mg subsamples determined by the Australian Nuclear Science & Technology Organisation (ANSTO) located in Lucas Heights, NSW, Australia. Table 4 provides performance gate intervals for the certified values of each method group based on their pooled 1SD's. Tabulated results of all elements together with uncorrected means, medians, standard deviations, relative standard deviations and per cent deviation of lab means from the corrected mean of means (PDM³) are presented in the detailed certification data for this CRM (**OREAS 521 DataPack.xlsx**).

STATISTICAL ANALYSIS

Certified Values, Confidence Limits, Standard Deviations and Tolerance Limits (Table 1) have been determined for each analytical method following the removal of individual, laboratory dataset (batch) and 3SD outliers (single iteration). For individual outliers within a laboratory batch the z-score test is used in combination with a second method that determines the per cent deviation of the individual value from the batch median. Outliers in general are selected on the basis of z-scores > 2.5 and with per cent deviations (i) > 3 and (ii) more than three times the average absolute per cent deviation for

the batch. In certain instances statistician's prerogative has been employed in discriminating outliers. Each laboratory data set mean is tested for outlying status based on z-score discrimination and rejected if > 2.5 . After individual and laboratory data set (batch) outliers have been eliminated a non-iterative 3 standard deviation filter is applied, with those values lying outside this window also relegated to outlying status.

Certified Values are the means of accepted laboratory means after outlier filtering. The INAA data (see Table 3) is omitted from determination of the certified values for gold (fire assay and aqua regia) and is used solely for the calculation of Tolerance Limits and homogeneity evaluation of OREAS 521.

Indicative Values (Table 2) are provided where the number of laboratories reporting a particular analyte is insufficient (< 5) to support certification or inter-laboratory consensus is poor.

95% Confidence Limits are inversely proportional to the number of participating laboratories and inter-laboratory agreement. It is a measure of the reliability of the certified value. A 95% confidence interval indicates a 95% probability that the true value of the analyte under consideration lies between the upper and lower limits. *95% Confidence Limits should not be used as control limits for laboratory performance.*

Standard Deviation values (1SDs) are reported in Table 1 and provide an indication of a level of performance that might reasonably be expected from a laboratory being monitored by this CRM in a QA/QC program. The SD's take into account errors attributable to measurement uncertainty and CRM variability. For an effective CRM the contribution of the latter should be negligible in comparison to measurement errors. The SD values thus include all sources of measurement uncertainty: between-lab variance, within-run variance (precision errors) and CRM variability. OREAS prepared reference materials have a level of homogeneity such that the observed variance from repeated analysis has its origin almost exclusively in the analytical process rather than the reference material itself.

The SD for each analyte's certified value is calculated from the same filtered data set used to determine the certified value, i.e. after removal of any individual, lab dataset (batch) and 3SD outliers (single iteration). These outliers can only be removed after the absolute homogeneity of the CRM has been independently established, i.e. the outliers must be confidently deemed to be analytical rather than arising from inhomogeneity of the CRM. **The standard deviation is then calculated for each analyte from the pooled accepted analyses generated from the certification program.**

In the application of SD's in monitoring performance it is important to note that not all laboratories function at the same level of proficiency and that different methods in use at a particular laboratory have differing levels of precision. Each laboratory has its own inherent SD (for a specific concentration level and analyte-method pair) based on the analytical process and this SD is not directly related to the round robin program.

The majority of data generated in the round robin program was produced by a selection of world class laboratories. The SD's thus generated are more constrained than those that would be produced across a randomly selected group of laboratories. To produce more generally achievable SD's the 'pooled' SD's provided in this report include inter-lab bias. This 'one size fits all' approach may require revision at the discretion of the QC manager concerned following careful scrutiny of QC control charts.

Table 4 shows **Performance Gates** calculated for two and three standard deviations. As a guide these intervals may be regarded as warning or rejection for multiple 2SD outliers, or rejection for individual 3SD outliers in QC monitoring, although their precise application should be at the discretion of the QC manager concerned. A second method utilises a 5% window calculated directly from the certified value. Standard deviation is also shown in relative percent for one, two and three relative standard deviations (1RSD, 2RSD and 3RSD) to facilitate an appreciation of the magnitude of these numbers and a comparison with the 5% window. Caution should be exercised when concentration levels approach lower limits of detection of the analytical methods employed as performance gates calculated from standard deviations tend to be excessively wide whereas those determined by the 5% method are too narrow.

Tolerance Limits (ISO Guide 3207) were determined using an analysis of precision errors method and are considered a conservative estimate of true homogeneity. The meaning of tolerance limits may be illustrated for copper via 4-acid digestion where 99% of the time ($1-\alpha=0.99$) at least 95% of subsamples ($\rho=0.95$) will have concentrations lying between 0.597 and 0.617 wt.%. Put more precisely, this means that if the same number of subsamples were taken and analysed in the same manner repeatedly, 99% of the tolerance intervals so constructed would cover at least 95% of the total population, and 1% of the tolerance intervals would cover less than 95% of the total population (ISO Guide 35).

For gold, tolerance can be determined by INAA using the reduced analytical subsample method which utilises the known relationship between standard deviation and analytical subsample weight (Ingamells and Switzer, 1973). In this approach the latter parameter is substantially reduced to a point where most of the variability in replicate assays is due to inhomogeneity of the reference material and measurement error becomes negligible. In this instance very small subsample weights of 85 milligrams were employed and the 1RSD of 0.29% at a 30g charge weight (5.42% at 85mg weights) confirms the high level of gold homogeneity in OREAS 521 (see Table 3 below).

The homogeneity of OREAS 521 has also been evaluated in a **nested ANOVA** of the round robin program. Each of the twenty-six round robin laboratories received six samples per CRM and these samples were made up of paired samples from three different, non-adjacent sampling intervals. The purpose of the ANOVA evaluation is to test that no statistically significant difference exists in the variance between-units to that of the variance within-units. This allows an assessment of homogeneity across the entire prepared batch of OREAS 521. The test was performed using the following parameters:

- Significance Level $\alpha = P$ (type I error) = 0.05;
- Null Hypothesis, H_0 : Between-unit variance is no greater than within-unit variance (reject H_0 if p -value < 0.05);
- Alternative Hypothesis, H_1 : Between-unit variance is greater than within-unit variance.

P -values are a measure of probability where values less than 0.05 indicate a greater than 95% probability that the observed differences in within-unit and between-unit variances are real. The dataset was filtered for both individual and laboratory data set (batch) outliers prior to the calculation of the p -value. This process derived no significant p -values for all 161 certified values and the Null Hypothesis is retained.

It is important to note that ANOVA is not an absolute measure of homogeneity. Rather, it establishes whether or not the analytes are distributed in a similar manner throughout the packaging run of OREAS 521 and whether the variance between two subsamples from the same unit is statistically distinguishable to the variance from two subsamples taken from any two separate units. A reference material therefore, can possess poor absolute homogeneity yet still pass a relative homogeneity test if the within-unit heterogeneity is large and similar across all units.

Based on the statistical analysis of the results of the inter-laboratory certification program it can be concluded that OREAS 521 is fit-for-purpose as a certified reference material (see 'Intended Use' below). Furthermore, the homogeneity of OREAS 521 is of a level such that ***negligible sampling error exists*** for a conventional fire assay, peroxide fusion, 4-acid digestion, 3-acid digestion, aqua regia digestion, infrared combustion or pycnometry determination.

PARTICIPATING LABORATORIES

1. Actlabs, Ancaster, Ontario, Canada
2. ALS, Brisbane, QLD, Australia
3. ALS, Lima, Peru
4. ALS, Loughrea, Galway, Ireland
5. ALS, Perth, WA, Australia
6. ALS, Vancouver, BC, Canada
7. ANSTO, Lucas Heights, NSW, Australia
8. Bureau Veritas Commodities Canada Ltd, Vancouver, BC, Canada
9. Bureau Veritas Geoanalytical, Adelaide, SA, Australia
10. Bureau Veritas Geoanalytical, Perth, WA, Australia
11. Bureau Veritas Minerals, Santiago, Chile
12. Geoanalitica, Antofagasta, Chile
13. Inspectorate (BV), Lima, Peru
14. Intertek Genalysis, Adelaide, SA, Australia
15. Intertek Genalysis, Perth, WA, Australia
16. Intertek Testing Services, Cupang, Muntinlupa, Philippines
17. MinAnalytical Services, Perth, WA, Australia
18. Mineracao Mine Lab, Paracatu, Minas Gerais, Brazil
19. PT Geoservices Ltd, Cikarang, Jakarta Raya, Indonesia
20. PT Intertek Utama Services, Jakarta Timur, DKI Jakarta, Indonesia
21. SGS Australia Mineral Services, Perth, WA, Australia
22. SGS Canada Inc., Vancouver, BC, Canada
23. SGS CIMM T & S, Antofagasta, Chile
24. SGS del Peru, Lima, Peru
25. SGS Lakefield Research Ltd, Lakefield, Ontario, Canada
26. SGS Mineral Services, Townsville, QLD, Australia
27. Shiva Analyticals Ltd, Bangalore North, Karnataka, India

Table 1. Certified Values, SD's, 95% Confidence and Tolerance Limits for OREAS 521.

Constituent	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
Pb Fire Assay						
Au, Gold (ppm)	0.376	0.019	0.369	0.383	0.373*	0.380*
Peroxide Fusion ICP						
Al, Aluminium (wt.%)	4.78	0.133	4.72	4.84	4.68	4.88
As, Arsenic (ppm)	347	33	333	362	337	357
Ba, Barium (ppm)	16222	1432	14972	17473	15866	16578
Bi, Bismuth (ppm)	6.08	0.568	5.69	6.47	5.77	6.39
Ca, Calcium (wt.%)	3.98	0.242	3.87	4.10	3.89	4.08
Ce, Cerium (ppm)	128	5	124	132	125	131
Co, Cobalt (ppm)	387	17	378	395	375	399
Cr, Chromium (ppm)	38.1	6.7	33.3	42.9	34.5	41.6
Cs, Cesium (ppm)	0.76	0.068	0.72	0.80	0.69	0.83
Cu, Copper (wt.%)	0.609	0.013	0.602	0.616	0.601	0.617
Dy, Dysprosium (ppm)	3.80	0.233	3.64	3.97	3.62	3.98
Er, Erbium (ppm)	2.25	0.174	2.14	2.36	2.10	2.41
Fe, Iron (wt.%)	20.90	0.543	20.69	21.12	20.51	21.30
Ga, Gallium (ppm)	18.4	0.99	17.9	19.0	17.6	19.3
Gd, Gadolinium (ppm)	4.44	0.386	4.11	4.77	4.23	4.65
Hf, Hafnium (ppm)	3.58	0.45	3.16	3.99	IND	IND
Ho, Holmium (ppm)	0.79	0.069	0.75	0.83	0.74	0.83
K, Potassium (wt.%)	3.29	0.222	3.18	3.40	3.20	3.37
La, Lanthanum (ppm)	165	10	158	172	162	168
Li, Lithium (ppm)	19.1	2.4	17.0	21.1	17.4	20.8
Lu, Lutetium (ppm)	0.37	0.04	0.33	0.40	0.34	0.39
Mg, Magnesium (wt.%)	1.16	0.035	1.14	1.17	1.13	1.19
Mn, Manganese (wt.%)	0.332	0.020	0.323	0.342	0.324	0.340
Mo, Molybdenum (ppm)	139	9	132	145	134	143
Nb, Niobium (ppm)	6.14	0.84	5.40	6.87	5.49	6.79
Nd, Neodymium (ppm)	27.3	1.54	26.2	28.5	26.6	28.1
Ni, Nickel (ppm)	80	14	75	85	76	85
P, Phosphorus (wt.%)	0.086	0.008	0.081	0.091	0.079	0.092
Pr, Praseodymium (ppm)	9.03	0.765	8.46	9.59	8.77	9.29
Rb, Rubidium (ppm)	100	4.1	97	102	96	103
S, Sulphur (wt.%)	2.15	0.102	2.09	2.21	2.09	2.21
Sb, Antimony (ppm)	5.53	0.383	5.30	5.77	5.18	5.88
Sc, Scandium (ppm)	12.2	1.6	10.5	13.9	IND	IND
Si, Silicon (wt.%)	17.61	0.683	17.18	18.03	17.17	18.04
Sm, Samarium (ppm)	4.46	0.327	4.20	4.72	4.30	4.62
Sn, Tin (ppm)	8.44	0.833	7.70	9.18	7.21	9.67
Sr, Strontium (ppm)	174	7	170	179	172	177
Tb, Terbium (ppm)	0.65	0.041	0.62	0.68	0.62	0.68

Note: intervals may appear asymmetric due to rounding; *Gold Tolerance Limits for typical 30g fire assay charge weight determined from 20 x 85mg INAA results and the Sampling Constant (Ingamells & Switzer, 1973).

Table 1 continued.

Constituent	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
Peroxide Fusion ICP continued						
Th, Thorium (ppm)	9.38	0.319	9.21	9.55	9.01	9.75
Ti, Titanium (wt.%)	0.459	0.015	0.453	0.465	0.447	0.471
Tm, Thulium (ppm)	0.35	0.04	0.32	0.37	0.32	0.37
U, Uranium (ppm)	31.7	1.92	30.4	33.0	31.1	32.4
V, Vanadium (ppm)	227	16	216	238	220	234
W, Tungsten (ppm)	93	7.8	87	99	91	96
Y, Yttrium (ppm)	21.1	1.73	20.0	22.2	20.3	21.9
Yb, Ytterbium (ppm)	2.37	0.28	2.19	2.55	2.18	2.56
4-Acid Digestion						
Ag, Silver (ppm)	0.885	0.105	0.835	0.934	0.852	0.918
Al, Aluminium (wt.%)	4.77	0.146	4.71	4.82	4.68	4.86
As, Arsenic (ppm)	336	14	330	343	329	344
Be, Beryllium (ppm)	0.86	0.14	0.79	0.92	0.80	0.92
Bi, Bismuth (ppm)	5.85	0.404	5.68	6.02	5.70	5.99
Ca, Calcium (wt.%)	3.86	0.146	3.80	3.92	3.79	3.93
Ce, Cerium (ppm)	123	8	119	127	119	127
Co, Cobalt (ppm)	386	14	381	392	379	394
Cr, Chromium (ppm)	30.9	4.3	29.0	32.8	29.4	32.4
Cs, Cesium (ppm)	0.72	0.043	0.70	0.74	0.68	0.76
Cu, Copper (wt.%)	0.607	0.015	0.601	0.612	0.597	0.617
Dy, Dysprosium (ppm)	3.47	0.233	3.30	3.63	3.34	3.59
Er, Erbium (ppm)	2.12	0.134	2.02	2.21	1.99	2.24
Eu, Europium (ppm)	1.64	0.090	1.56	1.71	1.57	1.70
Fe, Iron (wt.%)	20.71	1.115	20.17	21.25	20.34	21.08
Ga, Gallium (ppm)	17.4	1.04	16.9	17.9	16.8	18.0
Gd, Gadolinium (ppm)	4.03	0.53	3.64	4.41	3.80	4.25
Hf, Hafnium (ppm)	3.23	0.204	3.13	3.33	3.12	3.34
Ho, Holmium (ppm)	0.72	0.048	0.68	0.75	0.70	0.74
In, Indium (ppm)	0.18	0.017	0.17	0.18	0.17	0.18
K, Potassium (wt.%)	3.16	0.117	3.10	3.22	3.08	3.24
La, Lanthanum (ppm)	139	16	132	146	135	143
Li, Lithium (ppm)	16.4	1.20	15.8	17.0	15.7	17.1
Lu, Lutetium (ppm)	0.33	0.027	0.31	0.35	0.31	0.35
Mg, Magnesium (wt.%)	1.13	0.062	1.10	1.16	1.11	1.15
Mn, Manganese (wt.%)	0.321	0.017	0.314	0.329	0.315	0.327
Mo, Molybdenum (ppm)	138	8	135	141	134	142
Na, Sodium (wt.%)	0.978	0.072	0.944	1.012	0.960	0.996
Nb, Niobium (ppm)	5.56	0.58	5.27	5.84	5.31	5.80
Nd, Neodymium (ppm)	25.4	1.16	24.6	26.2	24.6	26.1
Ni, Nickel (ppm)	73	4.3	71	75	71	75
P, Phosphorus (wt.%)	0.081	0.005	0.079	0.083	0.079	0.084

Note: intervals may appear asymmetric due to rounding.

Table 1 continued.

Constituent	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
4-Acid Digestion continued						
Pb, Lead (ppm)	9.35	0.905	8.88	9.82	8.84	9.85
Pr, Praseodymium (ppm)	8.43	0.683	7.93	8.92	8.10	8.75
Rb, Rubidium (ppm)	98	3.7	97	100	95	102
Re, Rhenium (ppm)	0.064	0.005	0.061	0.068	0.060	0.069
S, Sulphur (wt.%)	1.80	0.089	1.75	1.84	1.76	1.83
Sb, Antimony (ppm)	5.66	0.301	5.52	5.80	5.43	5.89
Sc, Scandium (ppm)	13.9	1.06	13.4	14.3	13.3	14.4
Se, Selenium (ppm)	2.37	0.47	2.16	2.59	IND	IND
Sm, Samarium (ppm)	4.19	0.241	4.01	4.37	4.00	4.37
Sn, Tin (ppm)	7.11	0.499	6.88	7.33	6.83	7.39
Sr, Strontium (ppm)	158	10	154	162	153	163
Ta, Tantalum (ppm)	0.45	0.05	0.42	0.47	0.42	0.47
Tb, Terbium (ppm)	0.61	0.050	0.58	0.64	0.58	0.63
Te, Tellurium (ppm)	0.76	0.069	0.74	0.79	0.70	0.83
Th, Thorium (ppm)	8.26	0.725	7.91	8.61	7.90	8.62
Ti, Titanium (wt.%)	0.393	0.024	0.382	0.404	0.381	0.405
Tl, Thallium (ppm)	0.27	0.026	0.26	0.28	0.25	0.29
Tm, Thulium (ppm)	0.30	0.03	0.28	0.32	0.28	0.32
U, Uranium (ppm)	31.0	2.00	30.0	32.0	30.1	31.8
V, Vanadium (ppm)	209	11	204	213	203	214
W, Tungsten (ppm)	92	7.0	88	95	89	94
Y, Yttrium (ppm)	19.9	0.97	19.5	20.3	19.4	20.4
Yb, Ytterbium (ppm)	2.10	0.134	2.03	2.18	2.03	2.18
Zn, Zinc (ppm)	24.4	2.7	23.2	25.7	23.1	25.8
Zr, Zirconium (ppm)	123	6	120	125	118	127
3-Acid Digestion (no HF)						
Ag, Silver (ppm)	0.867	0.151	0.761	0.972	IND	IND
As, Arsenic (ppm)	338	9	333	343	330	346
Co, Cobalt (ppm)	382	14	373	390	375	388
Cu, Copper (wt.%)	0.601	0.013	0.594	0.608	0.592	0.610
Fe, Iron (wt.%)	21.00	0.483	20.76	21.24	20.63	21.37
Mo, Molybdenum (ppm)	130	11	124	136	127	133
S, Sulphur (wt.%)	1.90	0.055	1.86	1.94	1.85	1.95
Aqua Regia Digestion						
Ag, Silver (ppm)	0.817	0.088	0.763	0.871	0.785	0.849
Al, Aluminium (wt.%)	1.44	0.045	1.41	1.46	1.41	1.46
As, Arsenic (ppm)	333	16	323	343	326	340
Au, Gold (ppm)	0.365	0.009	0.362	0.368	0.361 [†]	0.369 [†]
Be, Beryllium (ppm)	0.47	0.07	0.41	0.53	0.42	0.52
Bi, Bismuth (ppm)	5.84	0.281	5.63	6.06	5.58	6.11

Note: intervals may appear asymmetric due to rounding; [†]Gold Tolerance Limits for typical 25g aqua regia sample weight determined from 20 x 85mg INAA results and the Sampling Constant (Ingamells & Switzer, 1973).

Table 1 continued.

Constituent	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
Aqua Regia Digestion continued						
Ca, Calcium (wt.%)	3.66	0.134	3.57	3.74	3.58	3.74
Ce, Cerium (ppm)	121	6	116	126	117	125
Co, Cobalt (ppm)	374	23	360	388	367	380
Cr, Chromium (ppm)	32.7	1.66	31.7	33.7	30.9	34.5
Cs, Cesium (ppm)	0.55	0.051	0.51	0.60	0.54	0.57
Cu, Copper (wt.%)	0.599	0.016	0.589	0.608	0.589	0.609
Fe, Iron (wt.%)	19.96	0.852	19.43	20.49	19.54	20.37
Ga, Gallium (ppm)	14.3	1.9	13.2	15.4	13.8	14.7
Ge, Germanium (ppm)	0.28	0.05	0.21	0.34	IND	IND
Hf, Hafnium (ppm)	1.03	0.047	0.99	1.07	0.97	1.09
In, Indium (ppm)	0.17	0.012	0.16	0.18	0.16	0.18
K, Potassium (wt.%)	0.526	0.017	0.514	0.537	0.506	0.545
La, Lanthanum (ppm)	147	11	139	155	143	151
Li, Lithium (ppm)	16.7	1.9	15.3	18.1	15.7	17.7
Lu, Lutetium (ppm)	0.22	0.016	0.20	0.24	0.21	0.24
Mg, Magnesium (wt.%)	1.10	0.050	1.07	1.13	1.07	1.13
Mn, Manganese (wt.%)	0.300	0.013	0.290	0.310	0.294	0.306
Mo, Molybdenum (ppm)	133	8	128	138	130	136
Na, Sodium (wt.%)	0.045	0.007	0.040	0.049	IND	IND
Nb, Niobium (ppm)	0.49	0.05	0.43	0.55	0.46	0.52
Ni, Nickel (ppm)	68	3.6	66	71	66	70
P, Phosphorus (wt.%)	0.081	0.003	0.079	0.083	0.079	0.083
Pb, Lead (ppm)	9.04	0.838	8.44	9.64	8.67	9.41
Rb, Rubidium (ppm)	31.8	1.84	30.1	33.6	30.9	32.8
S, Sulphur (wt.%)	1.85	0.115	1.78	1.93	1.80	1.91
Sb, Antimony (ppm)	3.65	0.70	3.09	4.21	3.45	3.85
Sc, Scandium (ppm)	10.0	0.92	9.4	10.6	9.8	10.3
Se, Selenium (ppm)	2.39	0.39	2.08	2.70	2.16	2.61
Sn, Tin (ppm)	5.78	0.390	5.45	6.10	5.61	5.95
Sr, Strontium (ppm)	54	3.8	51	57	53	55
Tb, Terbium (ppm)	0.53	0.038	0.48	0.58	0.51	0.55
Te, Tellurium (ppm)	0.74	0.08	0.68	0.81	0.69	0.80
Th, Thorium (ppm)	7.84	0.612	7.36	8.31	7.52	8.16
Ti, Titanium (wt.%)	0.141	0.020	0.128	0.155	0.137	0.146
Tl, Thallium (ppm)	0.11	0.011	0.10	0.12	IND	IND
U, Uranium (ppm)	28.2	1.70	26.6	29.8	27.4	28.9
V, Vanadium (ppm)	200	13	191	209	195	204
W, Tungsten (ppm)	71	8	66	77	69	73
Y, Yttrium (ppm)	15.0	1.5	13.9	16.1	14.6	15.4
Yb, Ytterbium (ppm)	1.49	0.094	1.38	1.61	IND	IND
Zn, Zinc (ppm)	23.6	1.79	22.7	24.6	22.5	24.8
Zr, Zirconium (ppm)	38.3	4.7	34.6	41.9	36.9	39.6

Note: intervals may appear asymmetric due to rounding.

Table 1 continued.

Constituent	Certified Value	1SD	95% Confidence Limits		95% Tolerance Limits	
			Low	High	Low	High
Infrared Combustion						
S, Sulphur (wt.%)	2.17	0.047	2.15	2.19	2.14	2.19
Gas / Liquid Pycnometry						
SG, Specific Gravity (Unity)	3.12	0.066	3.09	3.15	3.10	3.15

Note: intervals may appear asymmetric due to rounding.

Table 2. Indicative Values for OREAS 521.

Constituent	Unit	Value	Constituent	Unit	Value	Constituent	Unit	Value
Pb Fire Assay								
Pd	ppb	< 5	Pt	ppb	4			
Peroxide Fusion ICP								
Ag	ppm	< 1	Ge	ppm	0.93	Ta	ppm	0.41
B	ppm	43.8	In	ppm	0.19	Te	ppm	1.01
Be	ppm	0.81	Pb	ppm	9.31	Tl	ppm	< 0.5
Cd	ppm	< 10	Re	ppm	< 0.1	Zn	ppm	27.6
Eu	ppm	3.08	Se	ppm	< 20	Zr	ppm	131
4-Acid Digestion								
Cd	ppm	< 0.02	Ge	ppm	0.23	Hg	ppm	0.17
Aqua Regia Digestion								
B	ppm	< 10	Gd	ppm	3.77	Re	ppm	0.068
Cd	ppm	0.035	Hg	ppm	0.100	Sm	ppm	3.90
Dy	ppm	3.11	Ho	ppm	0.61	Ta	ppm	0.007
Er	ppm	1.66	Nd	ppm	25.7	Tm	ppm	0.23
Eu	ppm	1.51	Pr	ppm	8.84			
Sulphuric Acid Leach (5%)								
Cu	wt.%	0.148						

Table 3. Instrumental Neutron Activation Analysis of Au on 20 x 85mg subsamples of OREAS 521.

Replicate No	INAA 85mg
1	0.378
2	0.395
3	0.397
4	0.423
5	0.350
6	0.360
7	0.358
8	0.362
9	0.354
10	0.373
11	0.384
12	0.383

Table 3 continued.

13	0.338
14	0.387
15	0.360
16	0.396
17	0.370
18	0.388
19	0.395
20	0.387
Mean	0.377
Median	0.381
Std Dev.	0.020
Rel.Std.Dev.	5.42%
PDM ³	0.19%

Table 4. Performance Gates for OREAS 521.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Pb Fire Assay											
Au, ppm	0.376	0.019	0.338	0.414	0.319	0.433	5.08%	10.16%	15.24%	0.357	0.395
Peroxide Fusion ICP											
Al, wt.%	4.78	0.133	4.51	5.04	4.38	5.18	2.78%	5.55%	8.33%	4.54	5.02
As, ppm	347	33	281	414	247	447	9.60%	19.20%	28.81%	330	365
Ba, ppm	16222	1432	13359	19086	11927	20517	8.83%	17.65%	26.48%	15411	17033
Bi, ppm	6.08	0.568	4.94	7.22	4.38	7.78	9.34%	18.67%	28.01%	5.78	6.38
Ca, wt.%	3.98	0.242	3.50	4.47	3.26	4.71	6.07%	12.15%	18.22%	3.79	4.18
Ce, ppm	128	5	118	139	112	144	4.18%	8.37%	12.55%	122	135
Co, ppm	387	17	353	420	337	437	4.32%	8.64%	12.96%	367	406
Cr, ppm	38.1	6.7	24.6	51.5	17.9	58.2	17.65%	35.31%	52.96%	36.2	40.0
Cs, ppm	0.76	0.068	0.63	0.90	0.56	0.96	8.88%	17.77%	26.65%	0.72	0.80
Cu, wt.%	0.609	0.013	0.582	0.636	0.569	0.649	2.22%	4.43%	6.65%	0.579	0.639
Dy, ppm	3.80	0.233	3.34	4.27	3.11	4.50	6.12%	12.24%	18.36%	3.61	3.99
Er, ppm	2.25	0.174	1.91	2.60	1.73	2.77	7.71%	15.42%	23.13%	2.14	2.37
Fe, wt.%	20.90	0.543	19.82	21.99	19.28	22.53	2.60%	5.19%	7.79%	19.86	21.95
Ga, ppm	18.4	0.99	16.4	20.4	15.5	21.4	5.37%	10.75%	16.12%	17.5	19.3
Gd, ppm	4.44	0.386	3.67	5.22	3.29	5.60	8.69%	17.37%	26.06%	4.22	4.67
Hf, ppm	3.58	0.45	2.67	4.48	2.22	4.94	12.66%	25.32%	37.98%	3.40	3.76
Ho, ppm	0.79	0.069	0.65	0.92	0.58	0.99	8.74%	17.49%	26.23%	0.75	0.83
K, wt.%	3.29	0.222	2.84	3.73	2.62	3.95	6.75%	13.50%	20.24%	3.12	3.45
La, ppm	165	10	145	185	135	195	6.01%	12.03%	18.04%	157	174
Li, ppm	19.1	2.4	14.4	23.8	12.0	26.2	12.39%	24.77%	37.16%	18.1	20.0
Lu, ppm	0.37	0.04	0.28	0.45	0.24	0.49	11.16%	22.32%	33.48%	0.35	0.38
Mg, wt.%	1.16	0.035	1.09	1.23	1.05	1.26	3.02%	6.04%	9.05%	1.10	1.22
Mn, wt.%	0.332	0.020	0.293	0.372	0.273	0.392	5.97%	11.93%	17.90%	0.316	0.349
Mo, ppm	139	9	121	156	112	165	6.42%	12.83%	19.25%	132	145
Nb, ppm	6.14	0.84	4.45	7.83	3.60	8.67	13.76%	27.51%	41.27%	5.83	6.44
Nd, ppm	27.3	1.54	24.3	30.4	22.7	32.0	5.63%	11.26%	16.90%	26.0	28.7

Note: intervals may appear asymmetric due to rounding.

Table 4 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Peroxide Fusion ICP continued											
Ni, ppm	80	14	52	108	38	122	17.45%	34.91%	52.36%	76	84
P, wt.%	0.086	0.008	0.070	0.102	0.062	0.110	9.47%	18.93%	28.40%	0.082	0.090
Pr, ppm	9.03	0.765	7.50	10.56	6.73	11.32	8.47%	16.94%	25.41%	8.57	9.48
Rb, ppm	100	4.1	91	108	87	112	4.10%	8.19%	12.29%	95	105
S, wt.%	2.15	0.102	1.95	2.35	1.84	2.46	4.74%	9.48%	14.21%	2.04	2.26
Sb, ppm	5.53	0.383	4.77	6.30	4.38	6.68	6.93%	13.85%	20.78%	5.26	5.81
Sc, ppm	12.2	1.6	9.0	15.4	7.4	17.0	13.07%	26.14%	39.21%	11.6	12.8
Si, wt.%	17.61	0.683	16.24	18.97	15.56	19.66	3.88%	7.76%	11.63%	16.73	18.49
Sm, ppm	4.46	0.327	3.81	5.11	3.48	5.44	7.32%	14.65%	21.97%	4.24	4.68
Sn, ppm	8.44	0.833	6.78	10.11	5.94	10.94	9.87%	19.73%	29.60%	8.02	8.86
Sr, ppm	174	7	161	188	154	195	4.00%	8.00%	12.00%	166	183
Tb, ppm	0.65	0.041	0.57	0.73	0.53	0.77	6.34%	12.68%	19.02%	0.62	0.68
Th, ppm	9.38	0.319	8.74	10.01	8.42	10.33	3.40%	6.80%	10.20%	8.91	9.85
Ti, wt.%	0.459	0.015	0.428	0.490	0.413	0.505	3.37%	6.73%	10.10%	0.436	0.482
Tm, ppm	0.35	0.04	0.27	0.42	0.24	0.46	10.65%	21.30%	31.95%	0.33	0.36
U, ppm	31.7	1.92	27.9	35.6	26.0	37.5	6.04%	12.08%	18.12%	30.1	33.3
V, ppm	227	16	196	259	180	275	6.95%	13.89%	20.84%	216	239
W, ppm	93	7.8	78	109	70	117	8.34%	16.67%	25.01%	89	98
Y, ppm	21.1	1.73	17.7	24.6	15.9	26.3	8.17%	16.35%	24.52%	20.1	22.2
Yb, ppm	2.37	0.28	1.81	2.93	1.53	3.21	11.87%	23.74%	35.61%	2.25	2.49
4-Acid Digestion											
Ag, ppm	0.885	0.105	0.675	1.095	0.570	1.200	11.86%	23.72%	35.58%	0.841	0.929
Al, wt.%	4.77	0.146	4.48	5.06	4.33	5.21	3.06%	6.13%	9.19%	4.53	5.01
As, ppm	336	14	309	364	295	377	4.07%	8.13%	12.20%	319	353
Be, ppm	0.86	0.14	0.58	1.13	0.44	1.27	16.18%	32.36%	48.54%	0.81	0.90
Bi, ppm	5.85	0.404	5.04	6.65	4.64	7.06	6.90%	13.81%	20.71%	5.56	6.14
Ca, wt.%	3.86	0.146	3.57	4.15	3.42	4.30	3.78%	7.56%	11.34%	3.67	4.05
Ce, ppm	123	8	107	140	99	148	6.64%	13.27%	19.91%	117	129
Co, ppm	386	14	358	415	344	429	3.70%	7.39%	11.09%	367	406
Cr, ppm	30.9	4.3	22.4	39.4	18.2	43.7	13.76%	27.51%	41.27%	29.4	32.5
Cs, ppm	0.72	0.043	0.63	0.80	0.59	0.85	5.92%	11.85%	17.77%	0.68	0.76
Cu, wt.%	0.607	0.015	0.577	0.636	0.562	0.651	2.46%	4.92%	7.38%	0.576	0.637
Dy, ppm	3.47	0.233	3.00	3.93	2.77	4.16	6.72%	13.44%	20.16%	3.29	3.64
Er, ppm	2.12	0.134	1.85	2.38	1.71	2.52	6.34%	12.68%	19.02%	2.01	2.22
Eu, ppm	1.64	0.090	1.45	1.82	1.36	1.91	5.51%	11.03%	16.54%	1.55	1.72
Fe, wt.%	20.71	1.115	18.48	22.94	17.37	24.06	5.38%	10.77%	16.15%	19.68	21.75
Ga, ppm	17.4	1.04	15.3	19.4	14.3	20.5	5.96%	11.91%	17.87%	16.5	18.2
Gd, ppm	4.03	0.53	2.97	5.08	2.44	5.61	13.13%	26.25%	39.38%	3.82	4.23
Hf, ppm	3.23	0.204	2.82	3.64	2.62	3.84	6.31%	12.62%	18.92%	3.07	3.39
Ho, ppm	0.72	0.048	0.62	0.82	0.57	0.86	6.74%	13.48%	20.22%	0.68	0.75
In, ppm	0.18	0.017	0.14	0.21	0.13	0.23	9.61%	19.22%	28.83%	0.17	0.19
K, wt.%	3.16	0.117	2.93	3.39	2.81	3.51	3.69%	7.37%	11.06%	3.00	3.32
La, ppm	139	16	108	170	92	186	11.21%	22.41%	33.62%	132	146

Note: intervals may appear asymmetric due to rounding.

Table 4 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
4-Acid Digestion continued											
Li, ppm	16.4	1.20	14.0	18.8	12.8	20.0	7.31%	14.61%	21.92%	15.6	17.2
Lu, ppm	0.33	0.027	0.28	0.38	0.25	0.41	8.13%	16.26%	24.38%	0.31	0.35
Mg, wt.%	1.13	0.062	1.01	1.25	0.95	1.31	5.44%	10.88%	16.33%	1.07	1.19
Mn, wt.%	0.321	0.017	0.287	0.356	0.270	0.373	5.36%	10.72%	16.08%	0.305	0.337
Mo, ppm	138	8	122	154	114	162	5.76%	11.51%	17.27%	131	145
Na, wt.%	0.978	0.072	0.834	1.122	0.762	1.194	7.36%	14.72%	22.08%	0.929	1.027
Nb, ppm	5.56	0.58	4.40	6.71	3.83	7.29	10.38%	20.75%	31.13%	5.28	5.83
Nd, ppm	25.4	1.16	23.1	27.7	21.9	28.9	4.56%	9.12%	13.68%	24.1	26.7
Ni, ppm	73	4.3	64	81	60	86	5.84%	11.68%	17.52%	69	77
P, wt.%	0.081	0.005	0.071	0.091	0.066	0.096	6.18%	12.37%	18.55%	0.077	0.085
Pb, ppm	9.35	0.905	7.54	11.16	6.63	12.06	9.68%	19.36%	29.03%	8.88	9.81
Pr, ppm	8.43	0.683	7.06	9.79	6.38	10.47	8.11%	16.21%	24.32%	8.00	8.85
Rb, ppm	98	3.7	91	106	87	109	3.75%	7.49%	11.24%	93	103
Re, ppm	0.064	0.005	0.054	0.075	0.048	0.081	8.30%	16.60%	24.90%	0.061	0.068
S, wt.%	1.80	0.089	1.62	1.97	1.53	2.06	4.95%	9.91%	14.86%	1.71	1.89
Sb, ppm	5.66	0.301	5.06	6.26	4.76	6.56	5.31%	10.63%	15.94%	5.38	5.94
Sc, ppm	13.9	1.06	11.7	16.0	10.7	17.1	7.68%	15.36%	23.04%	13.2	14.6
Se, ppm	2.37	0.47	1.43	3.31	0.96	3.79	19.86%	39.73%	59.59%	2.25	2.49
Sm, ppm	4.19	0.241	3.71	4.67	3.47	4.91	5.75%	11.50%	17.25%	3.98	4.40
Sn, ppm	7.11	0.499	6.11	8.10	5.61	8.60	7.02%	14.04%	21.07%	6.75	7.46
Sr, ppm	158	10	138	178	128	188	6.40%	12.79%	19.19%	150	166
Ta, ppm	0.45	0.05	0.34	0.55	0.28	0.61	12.28%	24.57%	36.85%	0.42	0.47
Tb, ppm	0.61	0.050	0.51	0.71	0.46	0.76	8.22%	16.44%	24.66%	0.58	0.64
Te, ppm	0.76	0.069	0.63	0.90	0.56	0.97	9.03%	18.06%	27.09%	0.73	0.80
Th, ppm	8.26	0.725	6.81	9.71	6.08	10.43	8.78%	17.56%	26.34%	7.85	8.67
Ti, wt.%	0.393	0.024	0.345	0.442	0.321	0.466	6.15%	12.30%	18.46%	0.374	0.413
Tl, ppm	0.27	0.026	0.22	0.32	0.19	0.35	9.50%	19.01%	28.51%	0.26	0.28
Tm, ppm	0.30	0.03	0.23	0.36	0.20	0.39	10.82%	21.64%	32.46%	0.28	0.31
U, ppm	31.0	2.00	27.0	35.0	25.0	37.0	6.45%	12.89%	19.34%	29.4	32.5
V, ppm	209	11	186	231	175	243	5.41%	10.82%	16.22%	198	219
W, ppm	92	7.0	78	106	71	113	7.67%	15.34%	23.01%	87	96
Y, ppm	19.9	0.97	17.9	21.8	17.0	22.8	4.86%	9.73%	14.59%	18.9	20.9
Yb, ppm	2.10	0.134	1.84	2.37	1.70	2.50	6.35%	12.70%	19.05%	2.00	2.21
Zn, ppm	24.4	2.7	19.0	29.8	16.4	32.5	11.01%	22.02%	33.03%	23.2	25.6
Zr, ppm	123	6	110	135	103	142	5.20%	10.41%	15.61%	116	129
3-Acid Digestion (no HF)											
Ag, ppm	0.867	0.151	0.564	1.169	0.413	1.320	17.46%	34.93%	52.39%	0.823	0.910
As, ppm	338	9	320	356	311	365	2.71%	5.41%	8.12%	321	355
Co, ppm	382	14	354	410	340	424	3.67%	7.34%	11.02%	362	401
Cu, wt.%	0.601	0.013	0.576	0.626	0.563	0.639	2.10%	4.20%	6.31%	0.571	0.631
Fe, wt.%	21.00	0.483	20.04	21.97	19.55	22.45	2.30%	4.60%	6.89%	19.95	22.05
Mo, ppm	130	11	108	152	97	163	8.39%	16.77%	25.16%	124	137
S, wt.%	1.90	0.055	1.79	2.01	1.73	2.06	2.92%	5.84%	8.76%	1.80	1.99

Note: intervals may appear asymmetric due to rounding.

Table 4 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Aqua Regia Digestion											
Ag, ppm	0.817	0.088	0.641	0.993	0.553	1.081	10.78%	21.56%	32.34%	0.776	0.858
Al, wt.%	1.44	0.045	1.35	1.53	1.30	1.57	3.13%	6.27%	9.40%	1.37	1.51
As, ppm	333	16	301	365	285	381	4.78%	9.56%	14.34%	316	350
Au, ppm	0.365	0.009	0.348	0.382	0.339	0.391	2.37%	4.74%	7.11%	0.347	0.383
Be, ppm	0.47	0.07	0.32	0.62	0.25	0.70	15.82%	31.64%	47.47%	0.45	0.50
Bi, ppm	5.84	0.281	5.28	6.41	5.00	6.69	4.81%	9.63%	14.44%	5.55	6.14
Ca, wt.%	3.66	0.134	3.39	3.92	3.25	4.06	3.67%	7.34%	11.01%	3.47	3.84
Ce, ppm	121	6	108	134	102	140	5.30%	10.61%	15.91%	115	127
Co, ppm	374	23	328	420	305	443	6.17%	12.35%	18.52%	355	393
Cr, ppm	32.7	1.66	29.4	36.0	27.7	37.7	5.09%	10.18%	15.27%	31.1	34.3
Cs, ppm	0.55	0.051	0.45	0.66	0.40	0.71	9.16%	18.33%	27.49%	0.53	0.58
Cu, wt.%	0.599	0.016	0.568	0.630	0.552	0.646	2.61%	5.21%	7.82%	0.569	0.629
Fe, wt.%	19.96	0.852	18.25	21.66	17.40	22.51	4.27%	8.54%	12.80%	18.96	20.96
Ga, ppm	14.3	1.9	10.5	18.0	8.7	19.9	13.07%	26.15%	39.22%	13.6	15.0
Ge, ppm	0.28	0.05	0.17	0.38	0.11	0.44	19.60%	39.20%	58.80%	0.26	0.29
Hf, ppm	1.03	0.047	0.94	1.13	0.89	1.17	4.51%	9.03%	13.54%	0.98	1.09
In, ppm	0.17	0.012	0.15	0.20	0.14	0.21	7.00%	13.99%	20.99%	0.16	0.18
K, wt.%	0.526	0.017	0.492	0.559	0.475	0.576	3.23%	6.46%	9.70%	0.499	0.552
La, ppm	147	11	126	169	115	180	7.32%	14.65%	21.97%	140	155
Li, ppm	16.7	1.9	12.9	20.5	11.0	22.4	11.39%	22.77%	34.16%	15.9	17.5
Lu, ppm	0.22	0.016	0.19	0.25	0.17	0.27	7.07%	14.13%	21.20%	0.21	0.23
Mg, wt.%	1.10	0.050	1.00	1.20	0.95	1.25	4.53%	9.06%	13.59%	1.05	1.16
Mn, wt.%	0.300	0.013	0.273	0.327	0.260	0.340	4.45%	8.91%	13.36%	0.285	0.315
Mo, ppm	133	8	118	148	110	156	5.75%	11.50%	17.25%	126	140
Na, wt.%	0.045	0.007	0.030	0.059	0.022	0.067	16.72%	33.43%	50.15%	0.042	0.047
Nb, ppm	0.49	0.05	0.38	0.59	0.33	0.65	10.88%	21.77%	32.65%	0.46	0.51
Ni, ppm	68	3.6	61	75	57	79	5.23%	10.47%	15.70%	65	72
P, wt.%	0.081	0.003	0.075	0.088	0.071	0.091	3.97%	7.95%	11.92%	0.077	0.085
Pb, ppm	9.04	0.838	7.37	10.72	6.53	11.56	9.27%	18.53%	27.80%	8.59	9.49
Rb, ppm	31.8	1.84	28.2	35.5	26.3	37.4	5.79%	11.59%	17.38%	30.3	33.4
S, wt.%	1.85	0.115	1.62	2.09	1.51	2.20	6.22%	12.44%	18.66%	1.76	1.95
Sb, ppm	3.65	0.70	2.24	5.06	1.54	5.76	19.29%	38.58%	57.88%	3.47	3.83
Sc, ppm	10.0	0.92	8.2	11.9	7.2	12.8	9.22%	18.44%	27.65%	9.5	10.5
Se, ppm	2.39	0.39	1.61	3.16	1.23	3.55	16.23%	32.46%	48.68%	2.27	2.51
Sn, ppm	5.78	0.390	5.00	6.56	4.61	6.95	6.75%	13.50%	20.24%	5.49	6.07
Sr, ppm	54	3.8	47	62	43	66	7.03%	14.06%	21.09%	52	57
Tb, ppm	0.53	0.038	0.46	0.61	0.42	0.65	7.17%	14.34%	21.52%	0.50	0.56
Te, ppm	0.74	0.08	0.58	0.91	0.50	0.99	10.85%	21.69%	32.54%	0.71	0.78
Th, ppm	7.84	0.612	6.61	9.06	6.00	9.67	7.81%	15.62%	23.43%	7.45	8.23
Ti, wt.%	0.141	0.020	0.102	0.181	0.082	0.201	14.03%	28.06%	42.10%	0.134	0.148
Tl, ppm	0.11	0.011	0.09	0.14	0.08	0.15	9.48%	18.96%	28.43%	0.11	0.12
U, ppm	28.2	1.70	24.8	31.6	23.1	33.3	6.04%	12.08%	18.12%	26.8	29.6
V, ppm	200	13	175	225	162	237	6.27%	12.55%	18.82%	190	210

Note: intervals may appear asymmetric due to rounding.

Table 4 continued.

Constituent	Certified Value	Absolute Standard Deviations					Relative Standard Deviations			5% window	
		1SD	2SD Low	2SD High	3SD Low	3SD High	1RSD	2RSD	3RSD	Low	High
Aqua Regia Digestion continued											
W, ppm	71	8	56	87	48	95	11.00%	22.01%	33.01%	68	75
Y, ppm	15.0	1.5	12.0	18.1	10.4	19.6	10.17%	20.34%	30.50%	14.3	15.8
Yb, ppm	1.49	0.094	1.30	1.68	1.21	1.78	6.31%	12.61%	18.92%	1.42	1.57
Zn, ppm	23.6	1.79	20.1	27.2	18.3	29.0	7.57%	15.14%	22.71%	22.5	24.8
Zr, ppm	38.3	4.7	28.9	47.7	24.2	52.4	12.28%	24.57%	36.85%	36.4	40.2
Infrared Combustion											
S, wt.%	2.17	0.047	2.07	2.26	2.03	2.31	2.16%	4.33%	6.49%	2.06	2.27
Gas / Liquid Pycnometry											
SG, Unity	3.12	0.066	2.99	3.25	2.92	3.32	2.11%	4.22%	6.33%	2.96	3.28

Note: intervals may appear asymmetric due to rounding.

PREPARER AND SUPPLIER OF THE REFERENCE MATERIAL

Reference material OREAS 521 has been prepared, certified and is supplied by:

ORE Research & Exploration Pty Ltd
 37A Hosie Street
 Bayswater North VIC 3153
 AUSTRALIA

Tel: +613-9729 0333
 Fax: +613-9729 8338
 Web: www.ore.com.au
 Email: info@ore.com.au

OREAS 521 is available in unit sizes of 60g and 100g sealed under nitrogen in laminated foil pouches.

INTENDED USE

OREAS 521 is intended for the following uses:

- for the monitoring of laboratory performance in the analysis of analytes reported in Table 1 in geological samples;
- for the verification of analytical methods for analytes reported in Table 1;
- for the calibration of instruments used in the determination of the concentration of analytes reported in Table 1.

STABILITY AND STORAGE INSTRUCTIONS

OREAS 521 has been sourced from iron oxide copper-gold ore and waste rock from the Ernest Henry deposit. It contains reactive sulphide (2.17% S) and has been packaged under a nitrogen environment (single use laminated foil pouches only). In its unopened state and under normal conditions of storage the CRM has a shelf life beyond ten years. Its stability will be monitored at regular intervals and purchasers notified if any changes are observed.

INSTRUCTIONS FOR CORRECT USE

The certified values for OREAS 521 refer to the concentration level in its packaged state. It should not be dried prior to weighing and analysis.

HANDLING INSTRUCTIONS

Fine powders pose a risk to eyes and lungs and therefore standard precautions such as the use of safety glasses and dust masks are advised.

TRACEABILITY


The analytical samples were selected in a manner to represent the entire batch of prepared CRM. This 'representivity' was maintained in each submitted laboratory sample batch and ensures the user that the data is traceable from sample selection through to the analytical results that underlie the consensus values. Each analytical data set has been validated by its assayer through the inclusion of internal reference materials and QC checks during analysis. The laboratories were chosen on the basis of their competence (from past performance in inter-laboratory programs) for a particular analytical method, analyte or analyte suite, and sample matrix. Most of these laboratories have and maintain ISO 17025 accreditation. The certified values presented in this report are calculated from the means of accepted data following robust statistical treatment as detailed in this report.

LEGAL NOTICE

Ore Research & Exploration Pty Ltd has prepared and statistically evaluated the property values of this reference material to the best of its ability. The Purchaser by receipt hereof releases and indemnifies Ore Research & Exploration Pty Ltd from and against all liability and costs arising from the use of this material and information.

QMS ACCREDITED

ORE Pty Ltd is accredited to ISO 9001:2008 by Lloyd's Register Quality Assurance Ltd for its quality management system including development, manufacturing, certification and supply of CRMs.

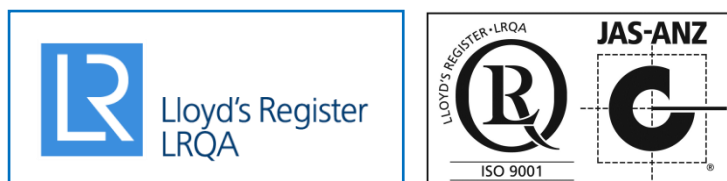

CERTIFYING OFFICER

Craig Hamlyn (B.Sc. Hons - Geology), Technical Manager - ORE P/L

REFERENCES

Ingamells, C. O. and Switzer, P. (1973), *Talanta* 20, 547-568.

ISO Guide 30 (1992), Terms and definitions used in connection with reference materials.

ISO Guide 31 (2000), Reference materials – Contents of certificates and labels.

ISO Guide 3207 (1975), Statistical interpretation of data - Determination of a statistical tolerance interval.

ISO Guide 35 (2006), Certification of reference materials - General and statistical principals.